




****NEW PRODUCT****

Polyshield Clear Topcoat

[Polyshield Clear topcoat](#) is a water based non-yellowing polyurethane sealer. This sealer is water clear with exceptional clarity. It dries quickly to a hard durable finish. It is resistant to water and marring when fully cured. [Polyshield](#) is UV stable which keeps it from yellowing over time. [Polyshield](#) can be used over genuine gold, white gold, silver, imitation gold, copper, and aluminum. [Polyshield](#) is available in gloss and satin. It is non-flammable, non-toxic and environmentally safe. Do not use with patent leaf or rolls; the wax residue on the leaf's backing paper will interfere with proper adhesion.

- Stir contents thoroughly, do not shake container
- Apply at package consistency, may be thinned up to 8oz per gallon with water only if needed
- May be applied by brush, or sprayed. If brushing apply in smooth even strokes, avoid over brushing
- Dries within one hour; allow two hours before recoating
- Cures in 7-10 days
- Coverage is about 400sq/ft per gallon
- Keep from freezing

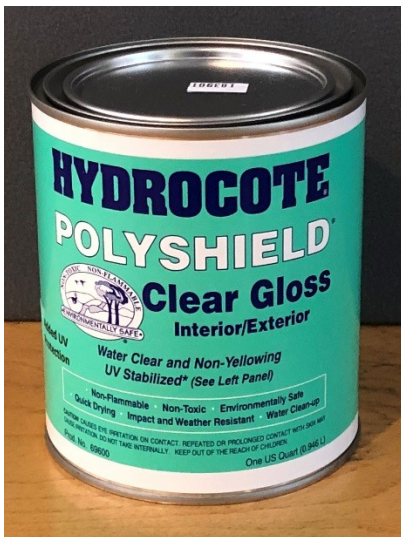

*** Always test substrates, primers and topcoats to be used with the size prior to beginning the gilding project. Since the conditions and use of all products sold, are beyond the control of the manufacturers and Sepp Leaf Products, the user assumes all risks associated with the use and performance of products purchased.***



****NEW PRODUCT****
Polyshield Clear Topcoat

This SeppLeaf Technical Guide and others may be found online at

http://seppleaf.com/technical_help

If you have questions or need clarification, please contact our knowledgeable staff via that link.

Products used in this Technical Guide

DUX Polyshield

<http://seppleaf.com/search?q=polyshield>